


# .338 REMINGTON ULTRA MAG

Remington has done it again. Right after the .300 Remington Ultra Mag was introduced, they followed it right up with the .338 Remington Ultra Mag. As with the .300 RUM, there is more capacity which results in higher velocities than other magnums.

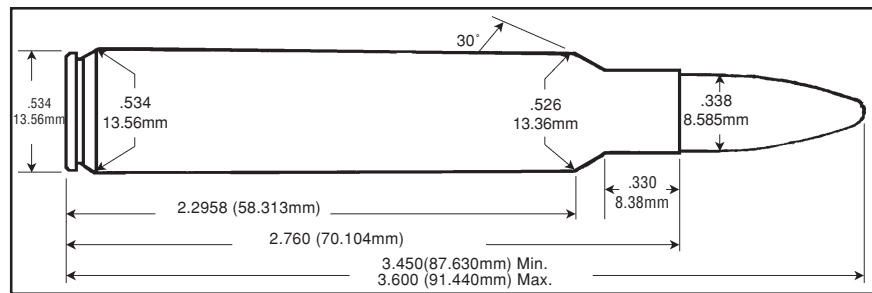

SAAMI Maximum Average Pressure is set at 65,000 P.S.I. Please use starting loads for this cartridge as reference ammunition was not yet available when we developed the following data.

<b>.338 REMINGTON ULTRA MAG</b>			
Gun	WISEMAN	Max Length	2.760"
Barrel Length	24"	Trim Length	2.740"
Primer	REM 9 <sup>1</sup> / <sub>2</sub> M	OAL Max	3.595"
Case	REM	OAL Min	3.320"

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment	
	Powder	Grains	Vel.	Powder	Grains	Vel.				
193 (L) FPGC	<b>5744</b>	---	---	<b>5744</b>	25.0	1595	13,600	3.310"	Penny's	
	<b>5744</b>	---	---	<b>5744</b>	40.0	2185	27,600			
HDY 200 SP	<b>5744</b>	---	---	<b>5744</b>	40.0	2123	27,400	3.575"	Light Load	
	<b>2700</b>	74.2	2741	<b>2700</b>	82.5	3115	61,800			
	<b>4350</b>	81.0	2813	<b>4350</b>	90.0	3197	61,500			
	<b>3100</b>	85.5	2838	<b>3100</b>	95.0	3226	63,100			
	<b>8700</b>	100.8	2566	<b>8700</b>	112.0	2916	46,500			Compressed
NOS 200 BT	<b>5744</b>	---	---	<b>5744</b>	40.0	2134	26,900	3.575"	Light Load	
	<b>2700</b>	74.2	2747	<b>2700</b>	82.5	3122	62,100			
	<b>4350</b>	81.0	2838	<b>4350</b>	90.0	3226	63,300			Compressed
	<b>3100</b>	84.1	2814	<b>3100</b>	93.5	3198	62,300			Compressed
	<b>8700</b>	97.2	2495	<b>8700</b>	108.0	2836	44,600			Compressed
SRA 215 SPBT	<b>5744</b>	---	---	<b>5744</b>	40.0	2115	28,700	3.575"	Light Load	
	<b>2700</b>	72.4	2646	<b>2700</b>	80.5	3007	63,000			
	<b>4350</b>	80.1	2751	<b>4350</b>	89.0	3127	63,000			Full Case
	<b>3100</b>	82.8	2728	<b>3100</b>	92.0	3101	63,400			Compressed
	<b>8700</b>	95.4	2442	<b>8700</b>	106.0	2775	43,900			Compressed

## .338 REMINGTON ULTRA MAG (continued)

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
HDY 225 SP	<b>5744</b>	---	---	<b>5744</b>	40.0	2083	30,800	3.575"	Light Load
	<b>2700</b>	72.0	2556	<b>2700</b>	80.0	2905	60,600		
	<b>4350</b>	79.2	2676	<b>4350</b>	88.0	3041	63,200		
	<b>3100</b>	82.8	2674	<b>3100</b>	92.0	3039	63,800		Compressed
	<b>8700</b>	95.4	2447	<b>8700</b>	106.0	2781	46,600		Compressed
SWF 225 AFSP	<b>5744</b>	---	---	<b>5744</b>	42.0	2144	32,800	3.490"	Light Load
	<b>2700</b>	69.3	2545	<b>2700</b>	77.0	2893	62,600		
	<b>4350</b>	76.5	2650	<b>4350</b>	85.0	3012	63,600		
	<b>3100</b>	81.0	2640	<b>3100</b>	90.0	3001	62,600		Compressed
	<b>8700</b>	93.6	2398	<b>8700</b>	104.0	2726	43,900		Compressed
HDY 250 SP	<b>5744</b>	---	---	<b>5744</b>	42.0	2087	35,200	3.575"	Light Load
	<b>2700</b>	68.4	2433	<b>2700</b>	76.0	2765	63,600		
	<b>4350</b>	75.1	2514	<b>4350</b>	83.5	2857	63,100		
	<b>3100</b>	80.1	2530	<b>3100</b>	89.0	2875	63,200		Compressed
	<b>8700</b>	93.6	2384	<b>8700</b>	104.0	2710	47,800		Compressed
NOS 250 PART	<b>5744</b>	---	---	<b>5744</b>	42.0	2082	35,300	3.575"	Light Load
	<b>2700</b>	64.8	2381	<b>2700</b>	72.0	2706	63,800		
	<b>4350</b>	72.9	2478	<b>4350</b>	81.0	2816	63,100		
	<b>3100</b>	78.3	2504	<b>3100</b>	87.0	2846	63,000		Compressed
	<b>8700</b>	93.6	2370	<b>8700</b>	104.0	2694	46,300		Compressed
SRA 250 SPBT	<b>5744</b>	---	---	<b>5744</b>	42.0	2113	36,100	3.575"	Light Load
	<b>2700</b>	64.8	2385	<b>2700</b>	72.0	2711	62,900		
	<b>4350</b>	74.2	2516	<b>4350</b>	82.5	2860	63,100		
	<b>3100</b>	78.7	2530	<b>3100</b>	87.5	2875	63,200		Compressed
	<b>8700</b>	93.6	2364	<b>8700</b>	104.0	2687	45,700		Compressed
SWF 250 AF	<b>5744</b>	---	---	<b>5744</b>	42.0	2088	36,300	3.490"	Light Load
	<b>2700</b>	63.9	2348	<b>2700</b>	71.0	2669	61,700		
	<b>4350</b>	72.0	2640	<b>4350</b>	80.0	3000	62,600		
	<b>3100</b>	77.4	2493	<b>3100</b>	86.0	2833	62,600		Compressed
	<b>8700</b>	93.6	2368	<b>8700</b>	104.0	2691	46,700		Compressed
SPR 250 GS	<b>5744</b>	---	---	<b>5744</b>	42.0	2053	36,000	3.575"	Light Load
	<b>2700</b>	63.9	2345	<b>2700</b>	71.0	2665	63,000		
	<b>4350</b>	71.1	2440	<b>4350</b>	79.0	2773	61,700		
	<b>3100</b>	77.4	2508	<b>3100</b>	86.0	2851	63,300		Compressed
	<b>8700</b>	93.6	2419	<b>8700</b>	104.0	2749	48,200		Compressed
SWF 275 AF	<b>5744</b>	---	---	<b>5744</b>	44.0	2082	42,900	3.490"	Light Load
	<b>2700</b>	59.4	2174	<b>2700</b>	66.0	2471	62,000		
	<b>4350</b>	66.6	2275	<b>4350</b>	74.0	2586	61,600		
	<b>3100</b>	75.6	2372	<b>3100</b>	84.0	2696	63,600		Compressed
	<b>8700</b>	88.2	2191	<b>8700</b>	98.0	2490	42,100		Compressed